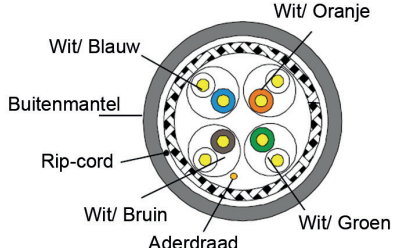


## Cat6A - SFTP - STUG - LSZH

Categorie	S/FTP CAT6A-4P-LSZH-AM30																																																																												
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																												
CPR Classificatie	Eca																																																																												
Kern	Stug - 100% koper	<b>Technische prestaties (100m):</b> <table><tr><th>Frequentie (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>20.0</td><td>-</td><td>74.3</td><td>570.0</td></tr><tr><td>4.0</td><td>23.0</td><td>3.8</td><td>65.3</td><td>552.0</td></tr><tr><td>8.0</td><td>24.5</td><td>5.3</td><td>60.8</td><td>546.7</td></tr><tr><td>10.0</td><td>25.0</td><td>5.9</td><td>59.3</td><td>545.4</td></tr><tr><td>16.0</td><td>25.0</td><td>7.5</td><td>56.2</td><td>543.0</td></tr><tr><td>20.0</td><td>25.0</td><td>8.4</td><td>54.8</td><td>542.1</td></tr><tr><td>25.0</td><td>24.3</td><td>9.4</td><td>53.3</td><td>541.2</td></tr><tr><td>31.25</td><td>23.6</td><td>10.5</td><td>51.9</td><td>540.4</td></tr><tr><td>62.5</td><td>21.5</td><td>15.0</td><td>47.4</td><td>538.6</td></tr><tr><td>100</td><td>20.1</td><td>19.1</td><td>44.3</td><td>537.6</td></tr><tr><td>200</td><td>18.0</td><td>27.6</td><td>39.8</td><td>536.5</td></tr><tr><td>250</td><td>17.3</td><td>31.1</td><td>38.3</td><td>536.3</td></tr><tr><td>300</td><td>16.8</td><td>34.3</td><td>37.1</td><td>536.1</td></tr><tr><td>500</td><td>15.2</td><td>45.3</td><td>33.8</td><td>535.6</td></tr></table>	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	20.0	-	74.3	570.0	4.0	23.0	3.8	65.3	552.0	8.0	24.5	5.3	60.8	546.7	10.0	25.0	5.9	59.3	545.4	16.0	25.0	7.5	56.2	543.0	20.0	25.0	8.4	54.8	542.1	25.0	24.3	9.4	53.3	541.2	31.25	23.6	10.5	51.9	540.4	62.5	21.5	15.0	47.4	538.6	100	20.1	19.1	44.3	537.6	200	18.0	27.6	39.8	536.5	250	17.3	31.1	38.3	536.3	300	16.8	34.3	37.1	536.1	500	15.2	45.3	33.8	535.6
Frequentie (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																								
1	20.0		-	74.3	570.0																																																																								
4.0	23.0		3.8	65.3	552.0																																																																								
8.0	24.5		5.3	60.8	546.7																																																																								
10.0	25.0		5.9	59.3	545.4																																																																								
16.0	25.0		7.5	56.2	543.0																																																																								
20.0	25.0		8.4	54.8	542.1																																																																								
25.0	24.3		9.4	53.3	541.2																																																																								
31.25	23.6		10.5	51.9	540.4																																																																								
62.5	21.5		15.0	47.4	538.6																																																																								
100	20.1		19.1	44.3	537.6																																																																								
200	18.0		27.6	39.8	536.5																																																																								
250	17.3	31.1	38.3	536.3																																																																									
300	16.8	34.3	37.1	536.1																																																																									
500	15.2	45.3	33.8	535.6																																																																									
Afscherming	SFTP																																																																												
AWG	23																																																																												
Diameter kabel	7,5 mm																																																																												
Lengte	305m																																																																												
Bandbreedte	500.0 MHz																																																																												
Buigradius	8x Diameter kabel																																																																												
Maximale trekkracht (Mpa)	≥ 10.0																																																																												
Materiaal buitenmantel	LSZH																																																																												
Kleur buitenmantel	Blauw																																																																												
Aderkleuren	1 - Wit/ Blauw																																																																												
	2 - Wit/ Oranje																																																																												
	3 - Wit/ Groen																																																																												
	4 - Wit/ Bruin																																																																												
Rip-cord	Aanwezig																																																																												
Verpakking	Haspel																																																																												