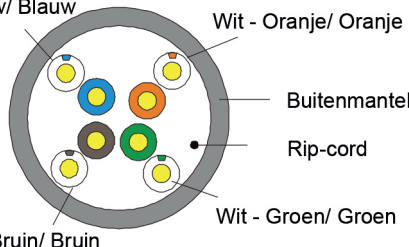


Cat5e - UTP - STUG - LSZH

Categorie	U/UTP CAT5E-4P-LSZH	<div></div>				
Referentie	ISO/IEC 11801 TIA-568-C.2					
CPR Classificatie	Eca					
Kern	Stug - 100% koper					
Afscherming	UTP	Technische prestaties (100m):				
AWG	24	Frequentie (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns
Diameter kabel	5 mm	1	20.0	2.0	65.3	570.00
Lengte	50m	4.0	23.0	4.1	56.3	552.00
Bandbreedte	100.0 MHz	8.0	24.5	5.8	51.8	546.73
Buigradius	8x Diameter kabel	10.0	25.0	6.5	50.3	545.38
Maximale trekkracht (Mpa)	≥ 13.5	16.0	25.0	8.2	47.2	543.00
Materiaal buitenmantel	LSZH	20.0	25.0	9.3	45.8	542.05
Kleur buitenmantel	Blauw	25.0	24.3	10.4	44.3	541.20
Aderkleuren	1 - Wit-Blauw/ Blauw	31.25	23.6	11.7	42.9	540.44
	2 - Wit-Oranje/ Oranje	62.5	21.5	17.0	38.4	538.55
	3 - Wit-Groen/ Groen	100	20.1	22.0	35.3	537.60
	4 - Wit-Bruin/ Bruin					
Rip-cord	Aanwezig	Frequentie (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	
Verpakking	Trekdoos	1	62.3	63.8	60.8	
		4.0	53.3	51.8	48.8	
		8.0	48.8	45.7	42.7	
		10.0	47.3	43.8	40.8	
		16.0	44.4	39.7	36.7	
		20.0	42.8	37.8	34.8	
		25.0	41.3	35.8	32.8	
		31.25	39.9	33.9	30.9	
		62.5	35.4	27.9	24.9	
		100	32.3	23.8	20.8	